





Model shown: RK 300T in RAL 7016 Anthracite Grey with optional sidelights and 1 meter long bar handle.


The RK Eco Range

Market leading specification and performance

Our Aluminium entrance doors are renowned for their high performance and specification, with PAS24:2016 Certification and Secured By Design accreditation as standard.

Our new Eco range offers the same quality and standards as our other ranges and has a 65mm deep profile with a 33mm thick centre panel. This door system offers an affordable high performance entrance solution for both modern and traditional residential and light commercial applications.

Matching sidelights in a single frame construction. See back page for standard specification details. Choice of accessory & hinge upgrades available – details on request.

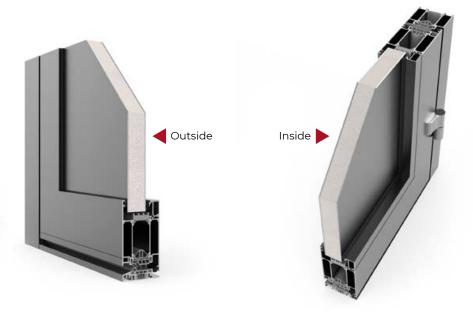



RK 100T



RK 400T



RK 200T




RK 500T



RK 300T



RK 600T

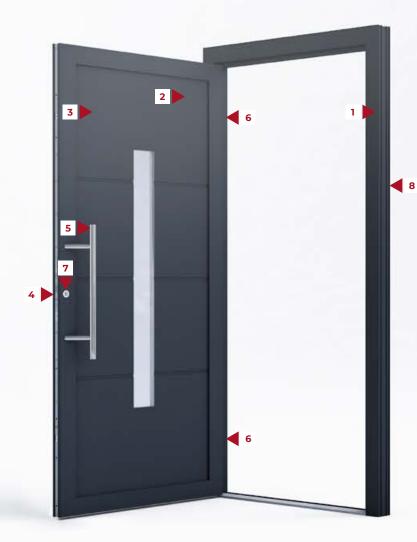

Matching sidelights in a single frame construction.

*Choice of accessory & hinge upgrades available – details on request.

Eco Range Specification

Our Eco profile range of doors are built to the same high standards as all RK Doors, offering the same high security accreditations and include the following specification:

- 1 System 65mm German profile Aluminium door system
- 2 Colours Choice of RAL 7016 matt or RAL 9016 matt colours
- 3 Construction High performance insulated door core with laminated security double glazing in either clear or Satinato obscure glass
- 4 Lock GU 5 point high security hook bolt lock with integrated an adjustable receiver
- 5 External handle Stainless steel external bar handle 600mm long with angled fixings or Stainless steel lever handle*
- 6 Hinges 2 piece adjustable flag hinge in Silver or White*
- 7 Cylinder BKS high security cylinder with thumbturn, 6 keys and security registration card
- 8 Size Standard door size up to 1100 x 2200mm high



